

## 20W SERIES

## STANDARD FABRIC




Super Heavy Duty 450 lbs, Capacity, Waterfall Front Contour Seat and 3" High Resilient Density Foam for Better Comfort

| Model   | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base              | Caster |
|---------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| AE20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Polished Aluminum | 1      |
| AE22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Polished Aluminum | 1      |
| PE20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Black Nylon       | 1      |
| PE22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Black Nylon       | 1      |

### COLOR OPTIONS




\*Pavarotti Group III\*

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1

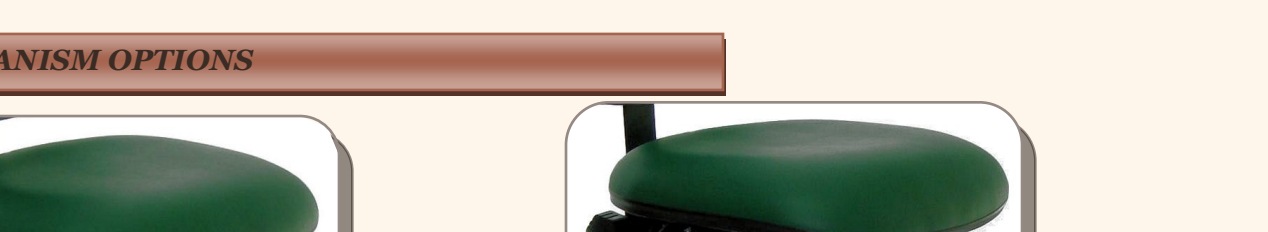




Brown-371 Black-351 Grey-331 Grey-332 Blue-311 Blue-312 Navy-321 Burgundy-362

### MECHANISM OPTIONS

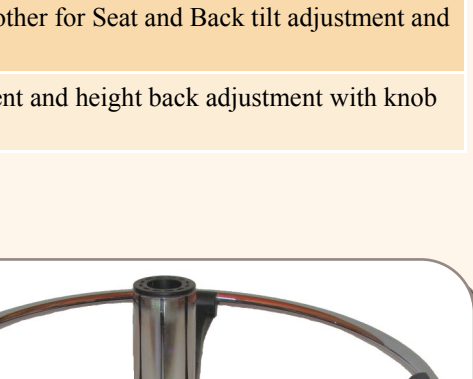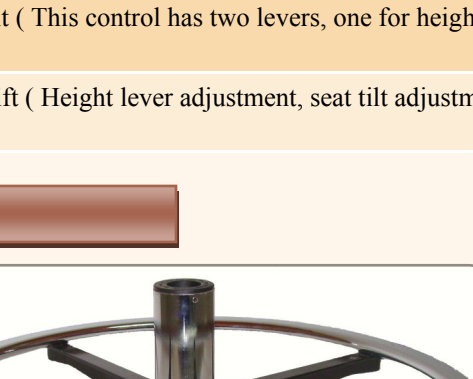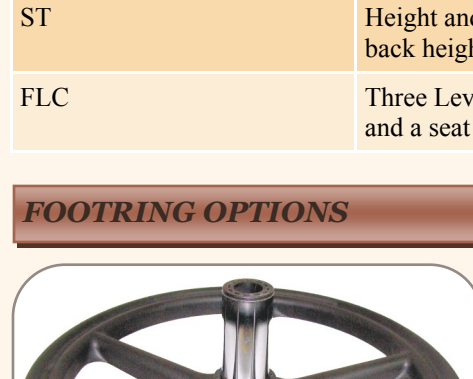



| Controls | Description  |
|----------|--|
| DLC      | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)                                  |
| ST       | Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)  |
| FLC      | Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

### FOOTRING OPTIONS

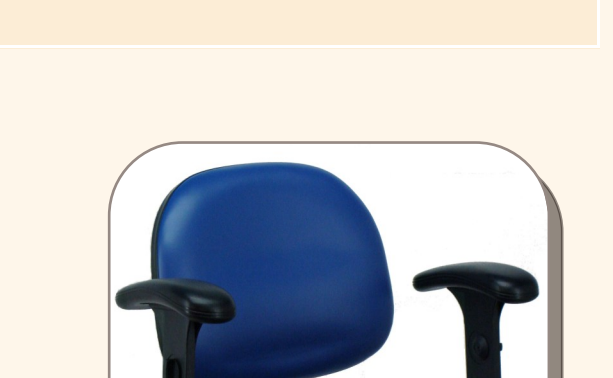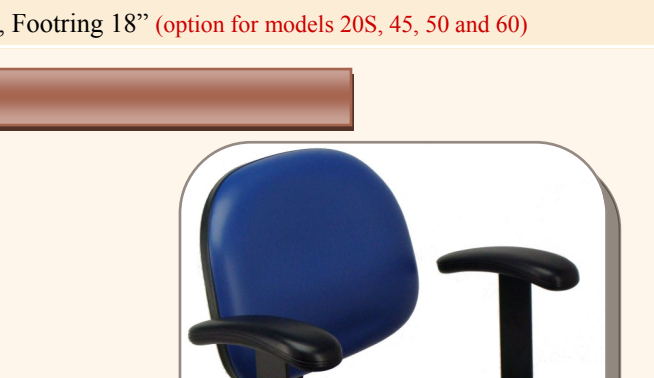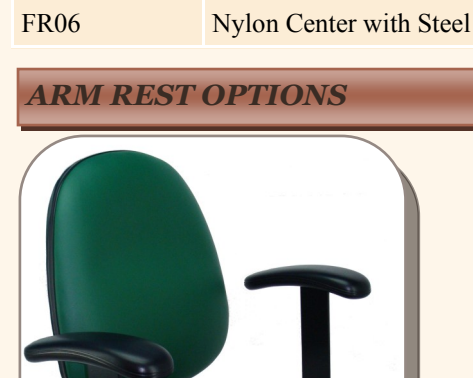





| Footring | Description   |
|----------|---|
| FR04     | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)        |
| FR05     | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06     | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)   |

### ARM REST OPTIONS

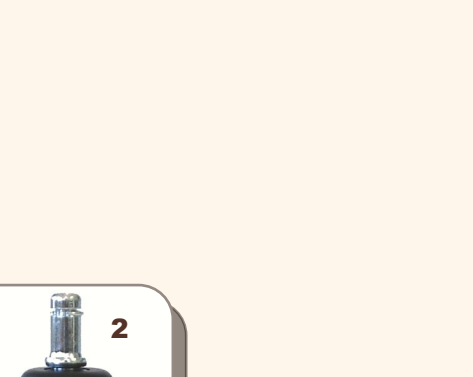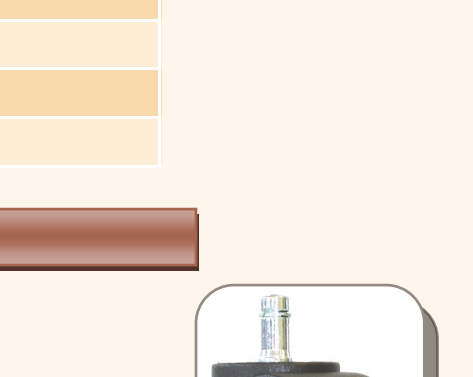

| Arms | Description                              |
|------|--|
| TF   | Fixed Height and Width, Black            |
| TA   | Fixed Height and Adjustable Width, Black |
| TAA  | Adjustable Height and Adjustable Width   |



### CASTER OPTIONS

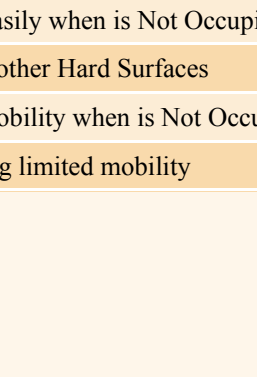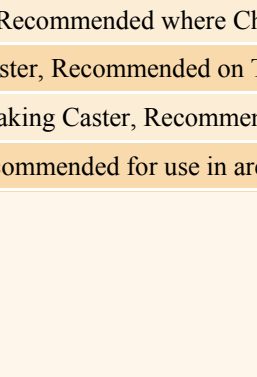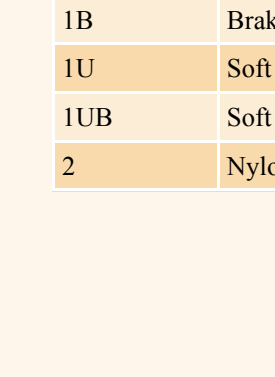

| Caster | Description  |
|--------|--|
| 1B     | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied   |
| 1U     | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces          |
| 1UB    | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2      | Nylon Glide, Recommended for use in areas where requiring limited mobility         |

## 20W SERIES

## STANDARD FABRIC

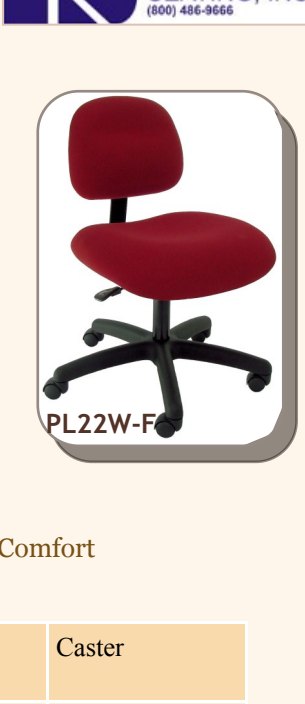

Super Heavy Duty 450 lbs, Capacity, Waterfall Front Contour Seat and 3" High Resilient Density Foam for Better Comfort

| Model   | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base              | Caster |
|---------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| AL20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Polished Aluminum | 1      |
| AL22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Polished Aluminum | 1      |
| PL20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Black Nylon       | 1      |
| PL22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Black Nylon       | 1      |

### COLOR OPTIONS



\*Pavarotti Group III\*

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1




Brown-371 Black-351 Grey-331 Grey-332 Blue-311 Blue-312 Navy-321 Burgundy-362

### MECHANISM OPTIONS

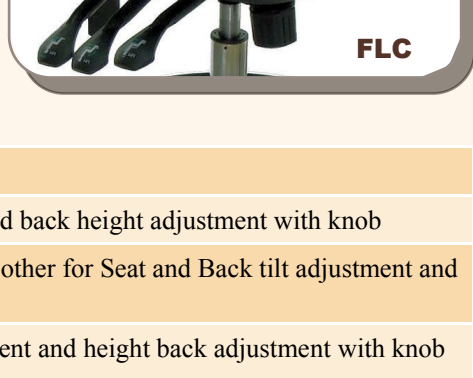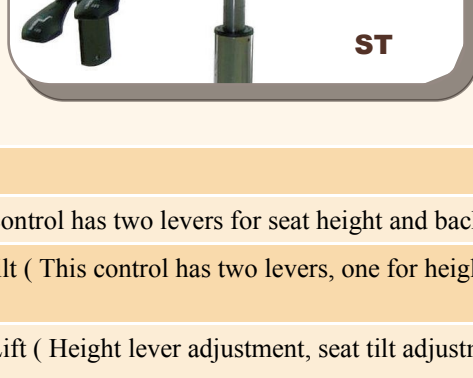

| Controls | Description  |
|----------|--|
| DLC      | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)                                  |
| ST       | Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)  |
| FLC      | Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

### FOOTRING OPTIONS

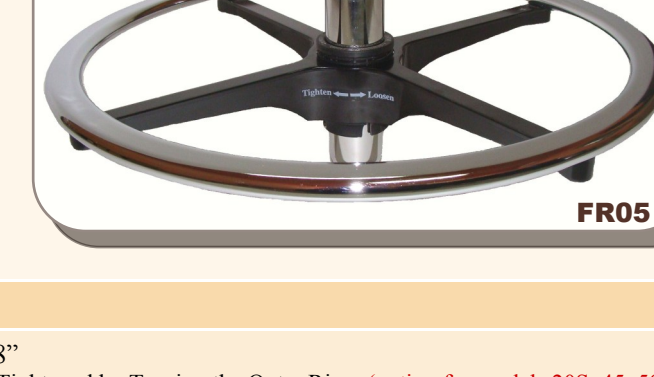




| Footring | Description   |
|----------|---|
| FR04     | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)        |
| FR05     | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06     | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)   |

### ARM REST OPTIONS



| Arms | Description                              |
|------|--|
| TF   | Fixed Height and Width, Black            |
| TA   | Fixed Height and Adjustable Width, Black |
| TAA  | Adjustable Height and Adjustable Width   |

### CASTER OPTIONS

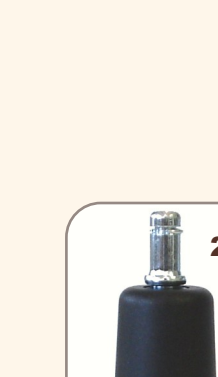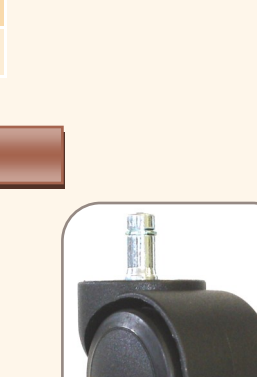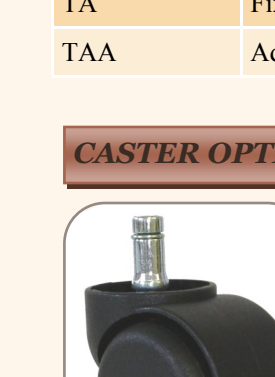

| Caster | Description  |
|--------|--|
| 1B     | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied   |
| 1U     | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces          |
| 1UB    | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2      | Nylon Glide, Recommended for use in areas where requiring limited mobility         |

## 20W SERIES

## STANDARD FABRIC




Super Heavy Duty 450 lbs, Capacity, Waterfall Front Contour Seat and 3" High Resilient Density Foam for Better Comfort

| Model   | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base              | Caster |
|---------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| AM20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Polished Aluminum | 1      |
| AM22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Polished Aluminum | 1      |
| PM20W-F | Fabric          | 21"-31"           | 21.5" W x 18" D | 19" W x 16.5" H | 20"      | Black Nylon       | 1      |
| PM22W-F | Fabric          | 17"-22"           | 21.5" W x 18" D | 19" W x 16.5" H |          | Black Nylon       | 1      |

### COLOR OPTIONS



\*Pavarotti Group III\*

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1

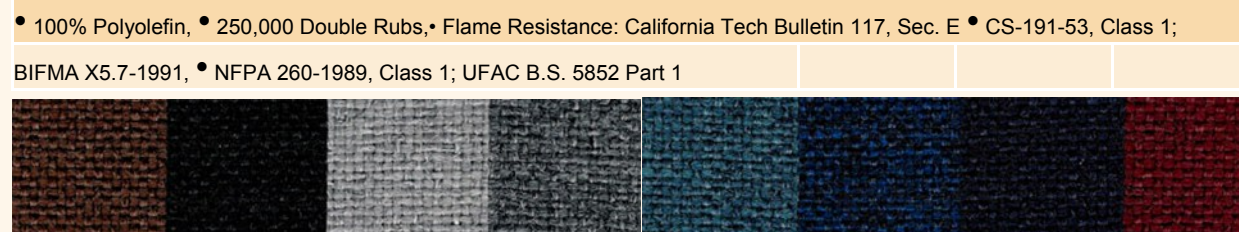

Brown-371 Black-351 Grey-331 Grey-332 Blue-311 Blue-312 Navy-321 Burgundy-362

### MECHANISM OPTIONS

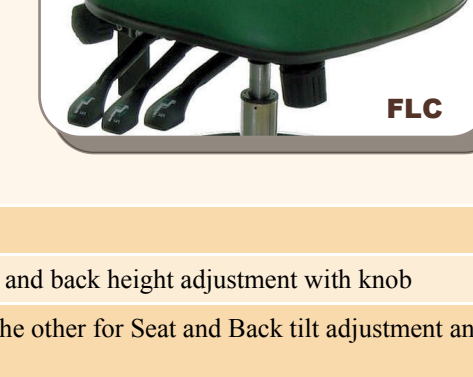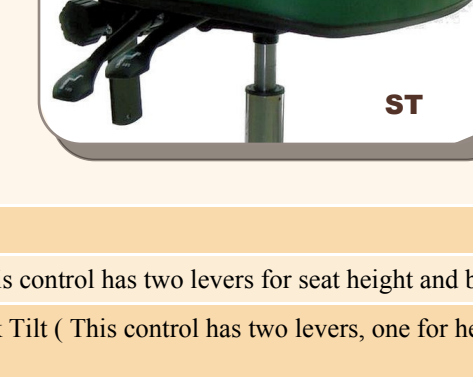




| Controls | Description  |
|----------|--|
| DLC      | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)                                  |
| ST       | Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)  |
| FLC      | Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

### FOOTRING OPTIONS






| Footring | Description   |
|----------|---|
| FR04     | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)        |
| FR05     | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06     | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)   |

### ARM REST OPTIONS

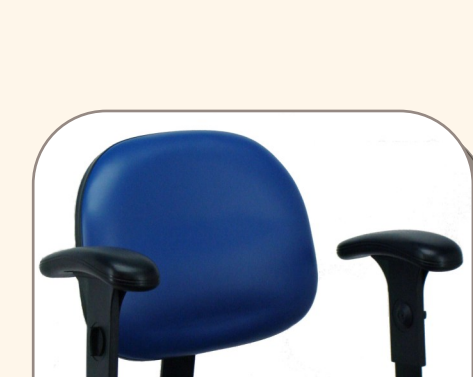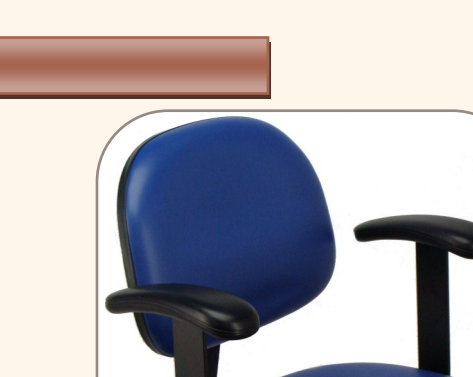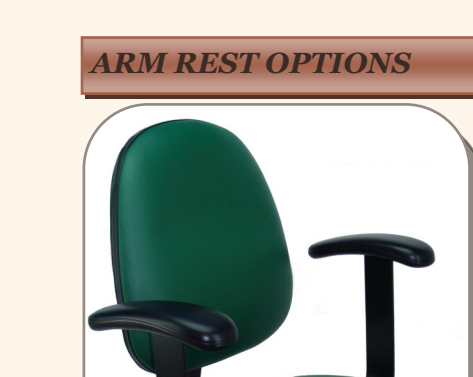

| Arms | Description                              |
|------|--|
| TF   | Fixed Height and Width, Black            |
| TA   | Fixed Height and Adjustable Width, Black |
| TAA  | Adjustable Height and Adjustable Width   |

### CASTER OPTIONS

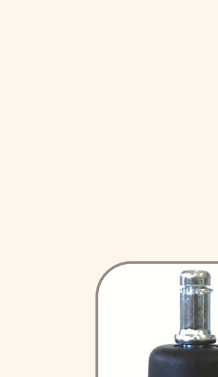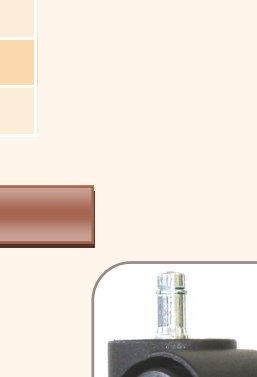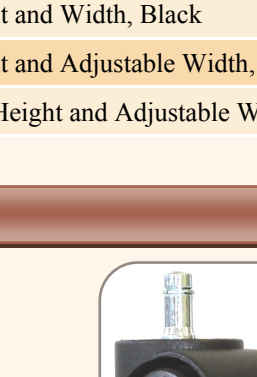

| Caster | Description  |
|--------|--|
| 1B     | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied   |
| 1U     | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces          |
| 1UB    | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2      | Nylon Glide, Recommended for use in areas where requiring limited mobility         |