



Dimensions

20"W x 18"D



Polished

Aluminum

No



9

TAA-BX-C

ESD-CLEANROOM VINYL

Drag Chain

No

No

Yes

Caster

9

9

1

INDUSTRIAL

ESD-CLEANROOM VINYL

Height Seat Back Footring Base Drag Chain Caster

Dimensions

15"W x 12"H 20"

AL12-VCC	ESD-Cleanroom Vinyl	17"-22"	20"W x 18"D	15"W x 12"H	No	Polished Aluminum	No	9
PL10-VCC	ESD-Cleanroom Vinyl	21"-31"	20"W x 18"D	15"W x 12"H	20"	Black Nylon	Yes	1
PL12-VCC	ESD-Cleanroom Vinyl	17"-22"	20"W x 18"D	15"W x 12"H	No	Black Nylon	Yes	1
Conductive Cleanroom Seating Features: Industrial Seating™conductive seating insures a safe, static-clear work area. All IS™ conductive seating models are equipped with conductive seat cushions, Back cushions, as well as all metal parts and the IS™ dual resistance system.								
COLOR OPTIONS								

Black-451

Burgandy-461

IsStat Group IV Vinyls ESD

Surface Resistence: 10⁷ to 10⁹ Ohms per Square.
 Flamability: Pass California Tech Bulletin 117

Carbon Filled Inner Layer

	Blue-411
ECHANISM OPTI	ONS
	0110

MECHANISM OPTIONS

NISM OPTI	IONS

M OPTIONS	


FLC

FOOTRING OPTIONS	

GOPTIONS				



FR04



Description Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob STHeight and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and

Controls DLC




Descripti
Knobless The Footri


Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tig
FR05	Knobless Aluminum with Stee The Footring is Loosened and
FR06	Nylon Center with Steel Ring,


ARM REST OPTIONS


	TF	-BX-C

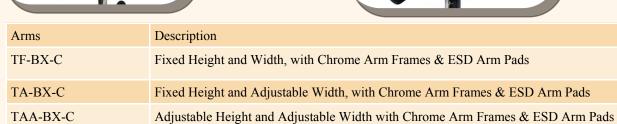







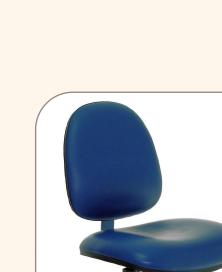



MODEL

AM10-VCC

AM12-VCC

PM10-VCC

PM12-VCC


COLOR OPTIONS


and the IS™ dual resistance system.


Carbon Filled Inner Layer









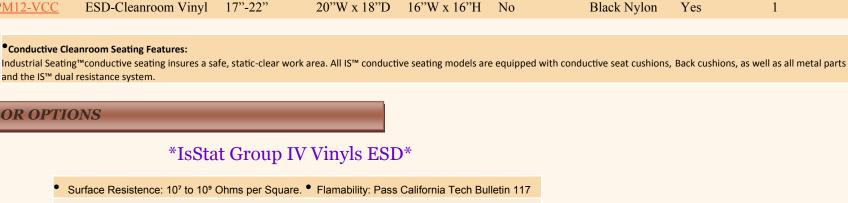




MECHANISM OPTIONS





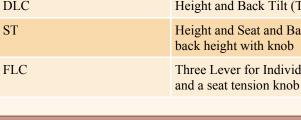





Description

Knobless Nylon Footring 18"

Knobless Aluminum with Steel Ring 20"


Footring FR04

FR05







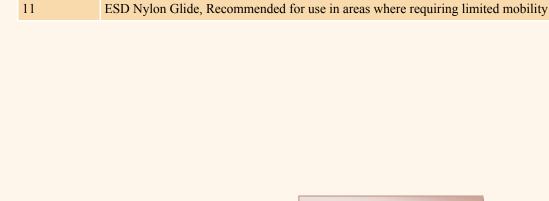

Caster 9B

9U

9UB









MECHANISM OPTIONS

Controls

DLC

ST

FLC


back height with knob and a seat tension knob **FOOTRING OPTIONS**

Blue-411

DLC

Description

Black-451

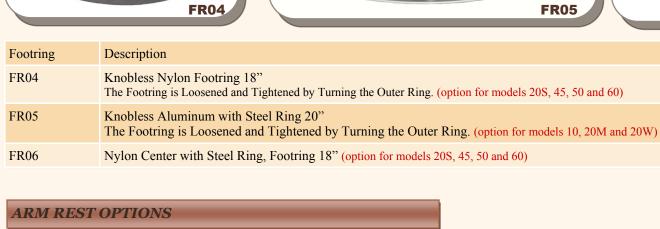

TF-BX-C



11





Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob

ng is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) Aluminum with Steel Ring 20" ring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

TA-BX-C

Description ESD Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied ESD Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces ESD Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied ESD Nylon Glide, Recommended for use in areas where requiring limited mobility





Seat

Dimensions

20"W x 18"D

20"W x 18"D

20"W x 18"D

Back

Dimensions

16"W x 16"H

16"W x 16"H

16"W x 16"H

16"W x 16"H

Footring

20"

No

Base

Polished

Polished


Aluminum

Aluminum

Black Nylon

Black Nylon



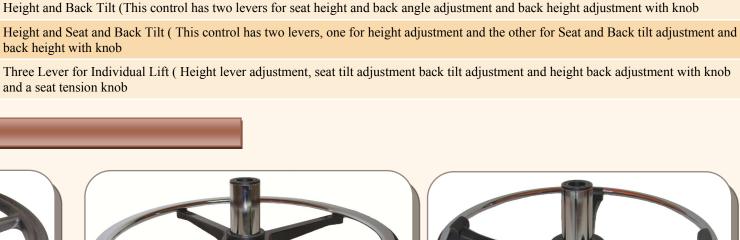

The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)





Description

Height

Adjustment


ESD Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied

ESD Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied

ESD Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces





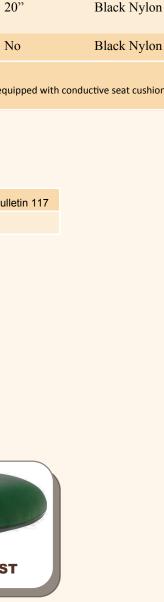

FR05


TA-BX-C

Base

Polished

Aluminum Polished

Aluminum

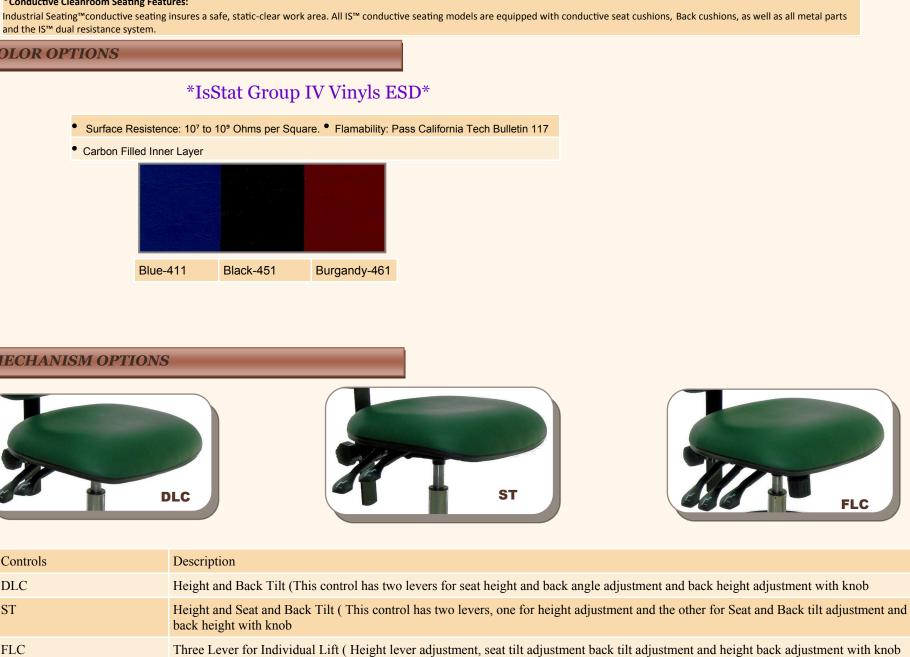








FR05

TA-BX-C

FR06

TAA-BX-C



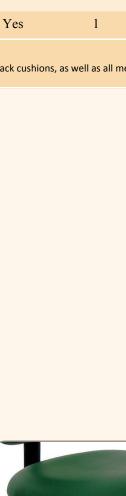

Caster

9

1

Drag Chain

No

No

Yes



