

60 SERIES

STANDARD FABRIC




Super Heavy Duty 300 lbs, Capacity, 2.5" High Resilient Density Foam for Better Comfort

| Model | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Caster |
|-------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| A60-F | Fabric | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Polished Aluminum | 1 |
| A62-F | Fabric | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Polished Aluminum | 1 |
| P60-F | Fabric | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Black Nylon | 1 |
| P62-F | Fabric | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Black Nylon | 1 |




COLOR OPTIONS

Pavarotti Group III

* 100% Polyolefin, * 250,000 Double Rubs, * Flame Resistance: California Tech Bulletin 117, Sec. E * CS-191-53, Class 1; BIFMA X5.7-1991, * NFPA 260-1989, Class 1, UFAC B.S. 5852 Part 1



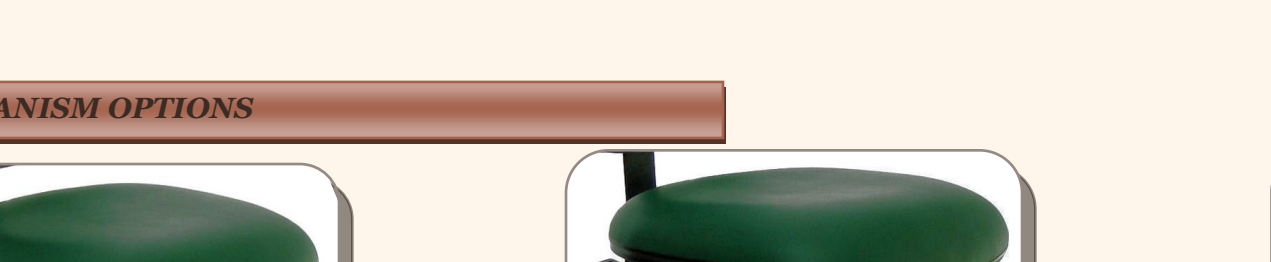


MECHANISM OPTIONS

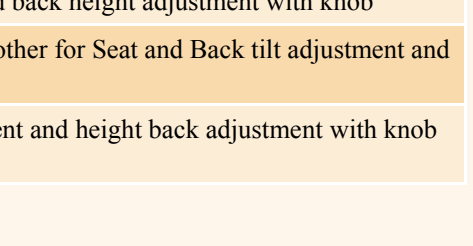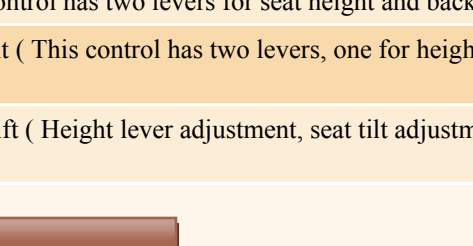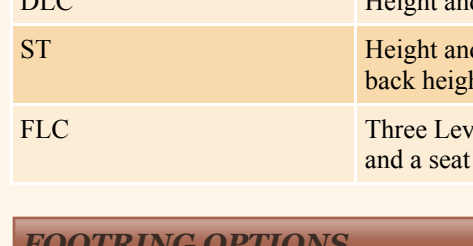




| Controls | Description |
|----------|--|
| DLC | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob) |
| ST | Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob) |
| FLC | Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

FOOTRING OPTIONS

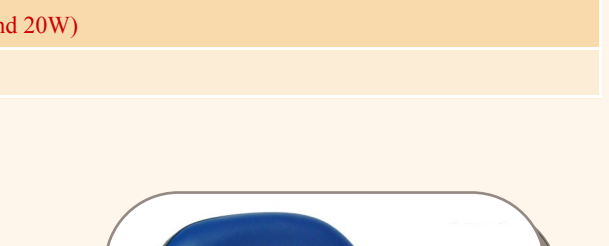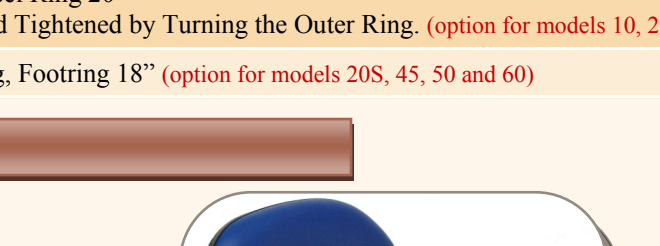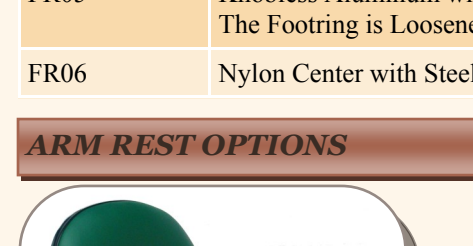





| Footring | Description |
|----------|--|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60) |

ARM REST OPTIONS

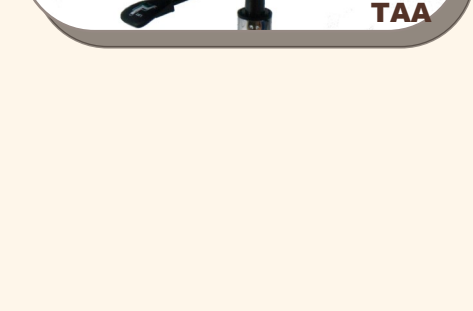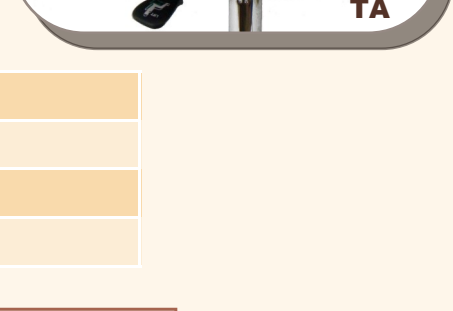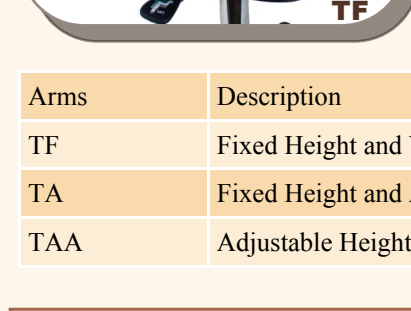

| Arms | Description |
|------|--|
| TF | Fixed Height and Width, Black |
| TA | Fixed Height and Adjustable Width, Black |
| TAA | Adjustable Height and Adjustable Width |

CASTER OPTIONS



| Caster | Description |
|--------|--|
| 1B | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied |
| 1U | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 1UB | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2 | Nylon Glide, Recommended for use in areas where requiring limited mobility |

60 SERIES

CONDUCTIVE FABRIC



Super Heavy Duty 300 lbs, Capacity, 2.5" High Resilient Density Foam for Better Comfort

| MODEL | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Drag Chain | Caster |
|--------|-------------------|-------------------|-----------------|-----------------|----------|-------------------|------------|--------|
| A60-FC | Conductive Fabric | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Polished Aluminum | No | 9 |
| A62-FC | Conductive Fabric | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Polished Aluminum | No | 9 |
| P60-FC | Conductive Fabric | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Black Nylon | Yes | 1 |
| P62-FC | Conductive Fabric | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Black Nylon | Yes | 1 |

Conductive Seating Features: Industrial Seating™ conductive seating insures a safe, static-clear work area. All IS™ conductive seating models are equipped with conductive seat cushions, back cushions, as well as all metal parts and the IS™ dual resistance system.

COLOR OPTIONS




IsStat Group IV Fabrics ESD

- Material 98% Polyolefin, 2% Carbon Infused Nylon • Surface Resistance: 10¹⁰ ohms per Square
- Flamability: Pass California tech. Bulletin 117






Blue-412 Blue-413 Navy-421 Black-452 Grey-431 Charc.-441 L. Burg.-462

MECHANISM OPTIONS

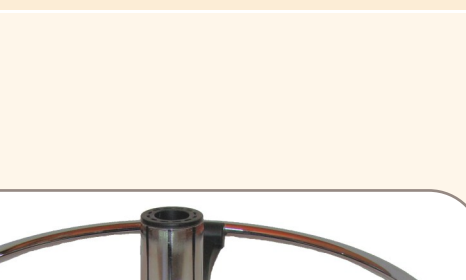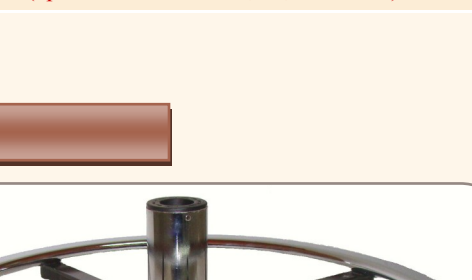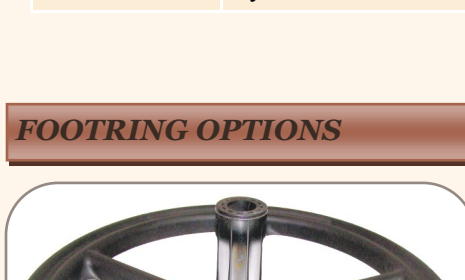



| Footring | Description |
|----------|--|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60) |

FOOTRING OPTIONS

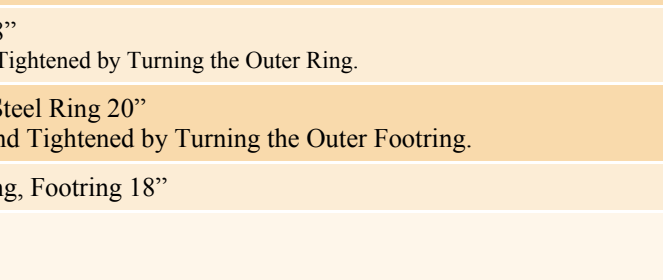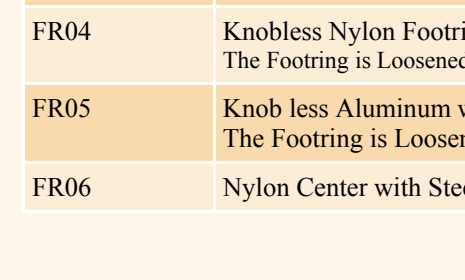





| Footring | Description |
|----------|---|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. |
| FR05 | Knob less Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Footring. |
| FR06 | Nylon Center with Steel Ring, Footring 18" |

ARM REST OPTIONS

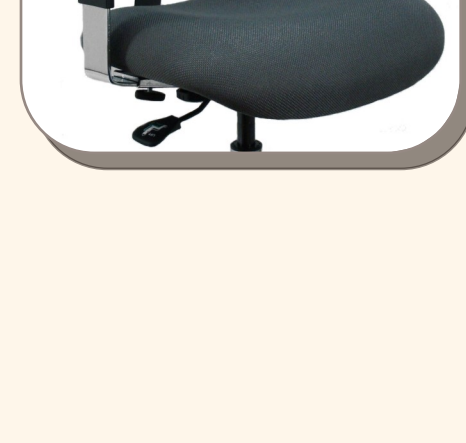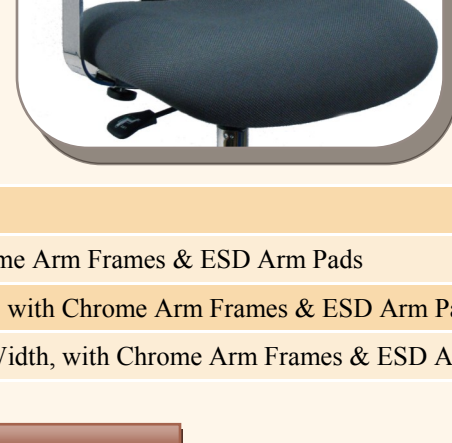

| Arms | Description |
|----------|---|
| TF-BX-C | Fixed Height and Width, with Chrome Arm Frames & ESD Arm Pads |
| TA-BX-C | Fixed Height and Adjustable Width, with Chrome Arm Frames & ESD Arm Pads |
| TAA-BX-C | Adjustable Height and Adjustable Width, with Chrome Arm Frames & ESD Arm Pads |

CASTER OPTIONS



| Caster | Description |
|--------|--|
| 9B | ESD Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied |
| 9U | ESD Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 9UB | ESD Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 11 | ESD Nylon Glide, Recommended for use in areas where requiring limited mobility |

60 SERIES

STANDARD VINYL



Super Heavy Duty 300 lbs, Capacity, 2.5" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat &

| Model | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Caster |
|-------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| A60-V | Vinyl | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Polished Aluminum | 1 |
| A62-V | Vinyl | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Polished Aluminum | 1 |
| P60-V | Vinyl | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Black Nylon | 1 |
| P62-V | Vinyl | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Black Nylon | 1 |

COLOR OPTIONS




PreFixx Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302




Blue-211 Navy-221 Burgundy-261 Black-251 Grey-231 Grey-232 Grey-233

MECHANISM OPTIONS

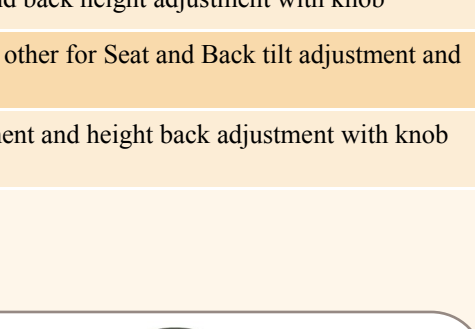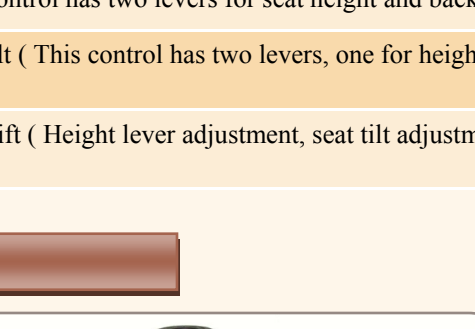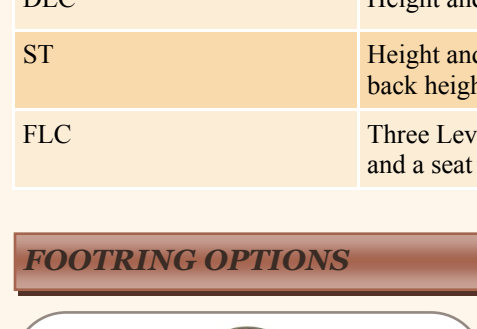


| Controls | Description |
|----------|--|
| DLC | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob) |
| ST | Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob) |
| FLC | Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

FOOTRING OPTIONS

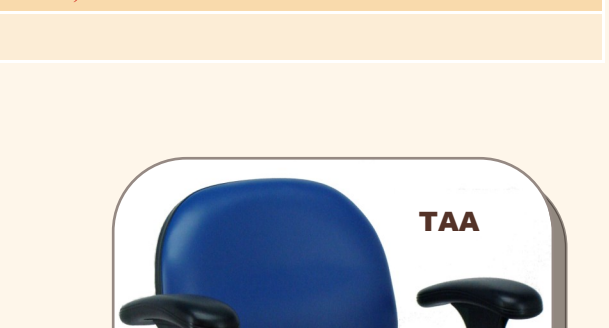





| Footring | Description |
|----------|--|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60) |

ARM REST OPTIONS

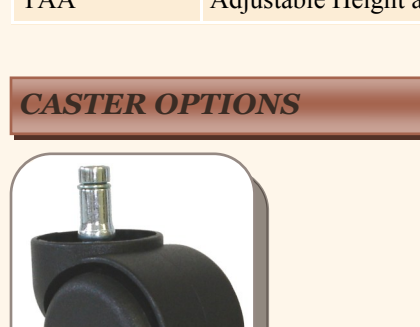

| Arms | Description |
|------|--|
| TF | Fixed Height and Width, Black |
| TA | Fixed Height and Adjustable Width, Black |
| TAA | Adjustable Height and Adjustable Width |


CASTER OPTIONS



| Caster | Description |
|--------|--|
| 1B | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied |
| 1U | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 1UB | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2 | Nylon Glide, Recommended for use in areas where requiring limited mobility |

60 SERIES

CONDUCTIVE VINYL

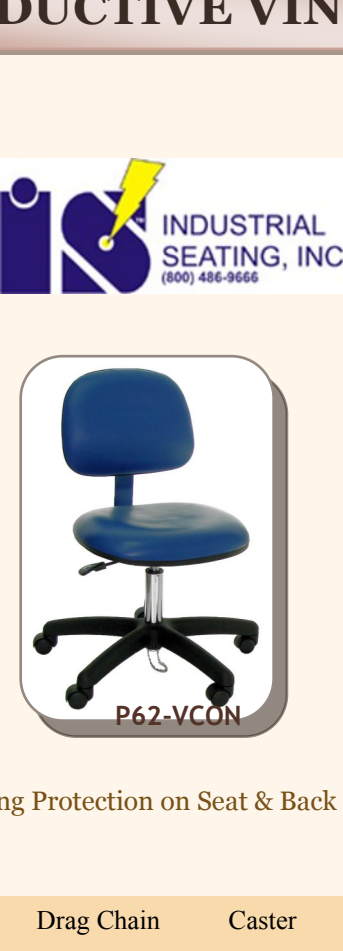

Super Heavy Duty 300 lbs, Capacity, 2-5" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

| MODEL | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Drag Chain | Caster |
|----------|------------------|-------------------|-----------------|-----------------|----------|-------------------|------------|--------|
| A60-VCON | Conductive Vinyl | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Polished Aluminum | No | 9 |
| A62-VCON | Conductive Vinyl | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Polished Aluminum | No | 9 |
| P60-VCON | Conductive Vinyl | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Black Nylon | Yes | 1 |
| P62-VCON | Conductive Vinyl | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Black Nylon | Yes | 1 |

Conductive Seating Features:
Industrial Seating® conductive seating insures a safe, static-clear work area. All IS™ conductive seating models are equipped with conductive seat cushions, back cushions, as well as all metal parts and the IS™ dual resistance system.

COLOR OPTIONS


IsStat Group IV Vinyls ESD

- Surface Resistance: 10⁷ to 10⁹ Ohms per Square. • Flammability: Pass California Tech Bulletin 117
- Carbon Filled Inner Layer





Blue-411 Black-451 Burgandy-461

MECHANISM OPTIONS

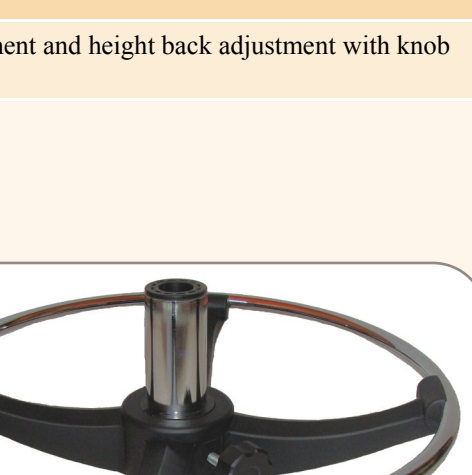



| Controls | Description |
|----------|--|
| DLC | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob) |
| ST | Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob) |
| FLC | Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

FOOTRING OPTIONS

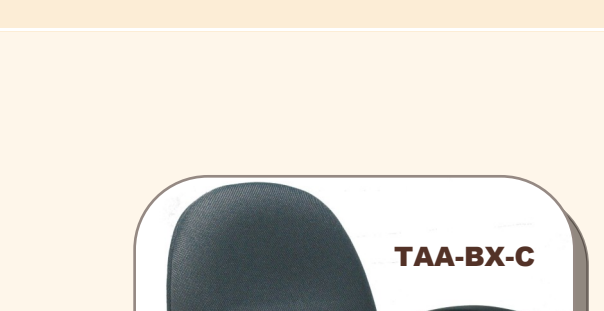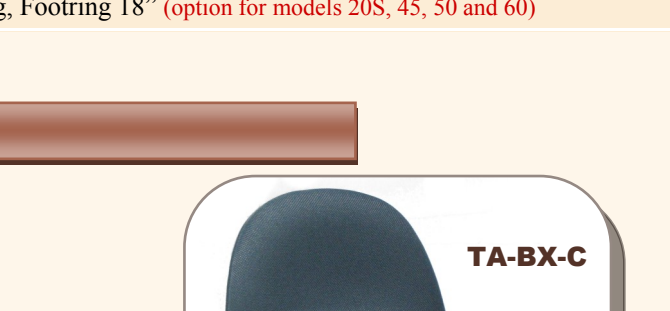





| Footring | Description |
|----------|--|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60) |

ARM REST OPTIONS

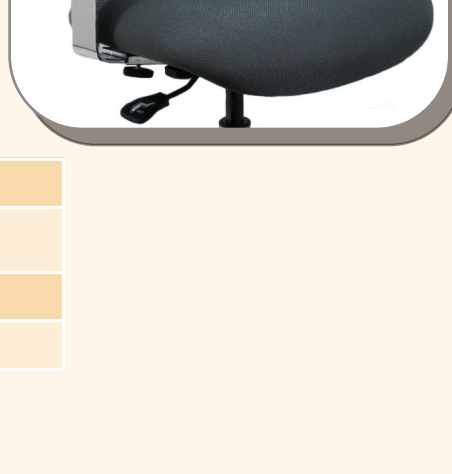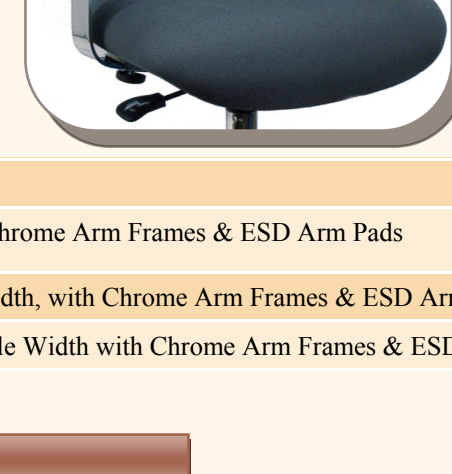

| Arms | Description |
|----------|--|
| TF-BX-C | Fixed Height and Width, with Chrome Arm Frames & ESD Arm Pads |
| TA-BX-C | Fixed Height and Adjustable Width, with Chrome Arm Frames & ESD Arm Pads |
| TAA-BX-C | Adjustable Height and Adjustable Width with Chrome Arm Frames & ESD Arm Pads |


CASTER OPTIONS



| Caster | Description |
|--------|--|
| 9B | ESD Braking Caster , Recommended where Chairs may roll to easily when is Not Occupied |
| 9U | ESD Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 9UB | ESD Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 11 | ESD Nylon Glide, Recommended for use in areas where requiring limited mobility |

60 SERIES

ESD-CLEANROOM VINYL

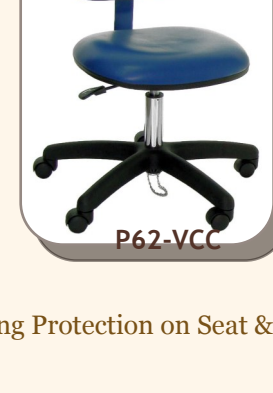

Super Heavy Duty 300 lbs, Capacity, 2-5" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

| MODEL | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Drag Chain | Caster |
|---------|---------------------|-------------------|-----------------|-----------------|----------|-------------------|------------|--------|
| A60-VCC | ESD-Cleanroom Vinyl | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Polished Aluminum | No | 9 |
| A62-VCC | ESD-Cleanroom Vinyl | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Polished Aluminum | No | 9 |
| P60-VCC | ESD-Cleanroom Vinyl | 21"-31" | 18"W x 17"D | 15"W x 12"H | 18" | Black Nylon | Yes | 1 |
| P62-VCC | ESD-Cleanroom Vinyl | 17"-22" | 18"W x 17"D | 15"W x 12"H | No | Black Nylon | Yes | 1 |

***Conductive Cleanroom Seating Features:**
Industrial Seating™ conductive seating insures a safe, static-clear work area. All IS™ conductive seating models are equipped with conductive seat cushions, Back cushions, as well as all metal parts and the IS™ dual resistance system.

COLOR OPTIONS




IsStat Group IV Vinyls ESD

- Surface Resistance: 10⁷ to 10⁹ Ohms per Square. • Flammability: Pass California Tech Bulletin 117
- Carbon Filled Inner Layer






Blue-411 Black-451 Burgandy-461

MECHANISM OPTIONS

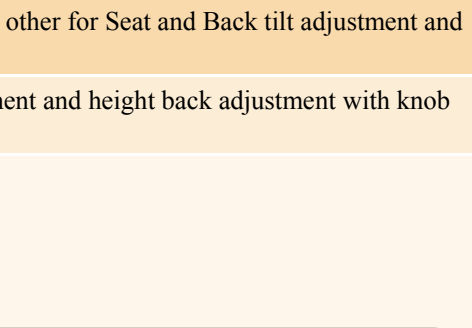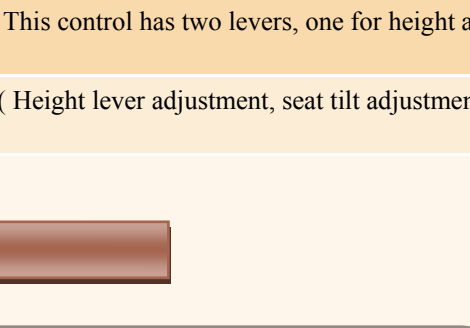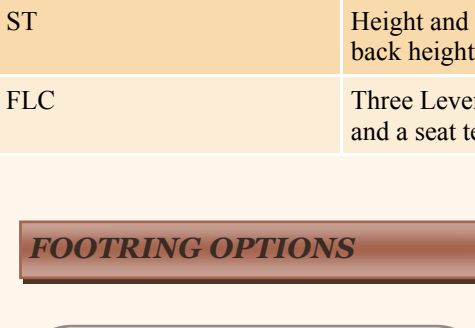



| Controls | Description |
|----------|--|
| DLC | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob) |
| ST | Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob) |
| FLC | Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

FOOTRING OPTIONS

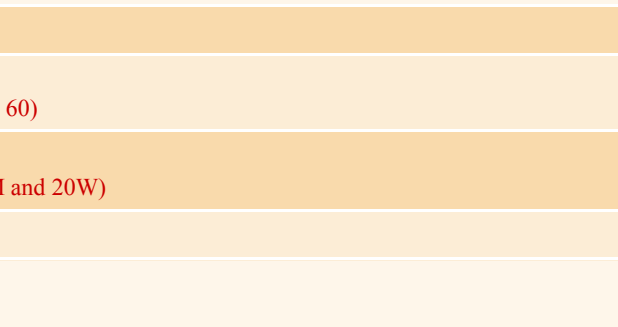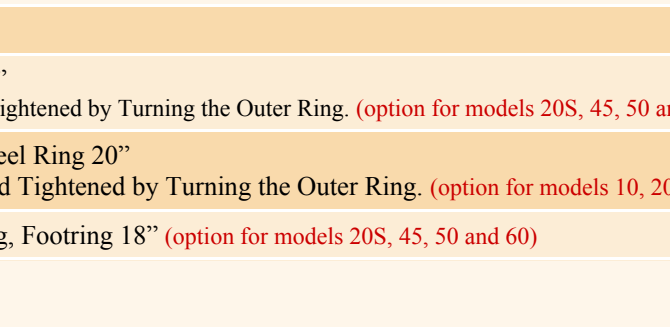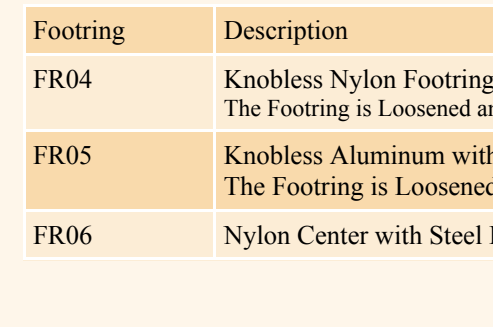





| Footring | Description |
|----------|--|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring. Footring 18" (option for models 20S, 45, 50 and 60) |

ARM REST OPTIONS

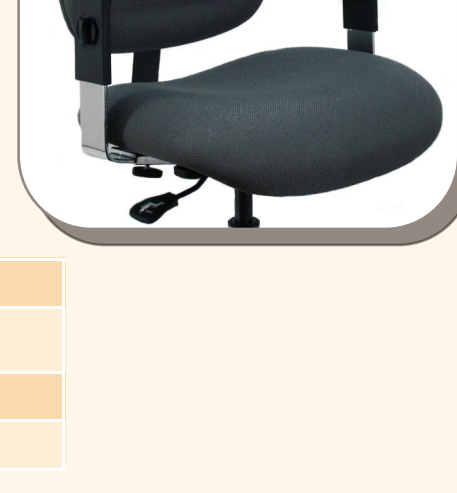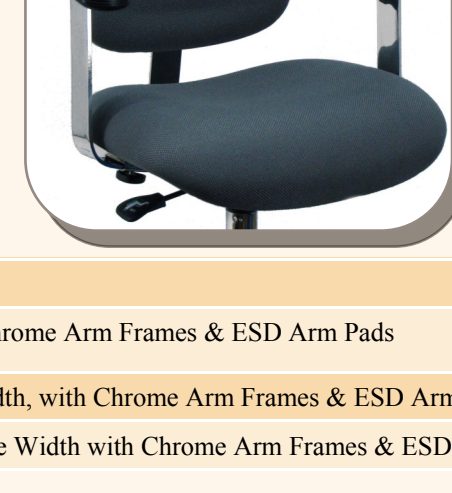

| Arms | Description |
|----------|--|
| TF-BX-C | Fixed Height and Width, with Chrome Arm Frames & ESD Arm Pads |
| TA-BX-C | Fixed Height and Adjustable Width, with Chrome Arm Frames & ESD Arm Pads |
| TAA-BX-C | Adjustable Height and Adjustable Width with Chrome Arm Frames & ESD Arm Pads |

CASTER OPTIONS



| Caster | Description |
|--------|--|
| 9B | ESD Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied |
| 9U | ESD Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 9UB | ESD Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 11 | ESD Nylon Glide, Recommended for use in areas where requiring limited mobility |



CLEANROOM VINYL



Super Heavy Duty 300 lbs, Capacity, 2.5" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat &


| Model | Upholstery Type | Height Adjustment | Seat Dimensions | Back Dimensions | Footring | Base | Caster |
|---------|-----------------|-------------------|-----------------|-----------------|----------|-------------------|--------|
| A60-VCR | Cleanroom Vinyl | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Polished Aluminum | 1 |
| A62-VCR | Cleanroom Vinyl | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Polished Aluminum | 1 |
| P60-VCR | Cleanroom Vinyl | 21"-31" | 18" W x 17" D | 15" W x 12" H | 18" | Black Nylon | 1 |
| P62-VCR | Cleanroom Vinyl | 17"-22" | 18" W x 17" D | 15" W x 12" H | | Black Nylon | 1 |

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/2 micron and or class 100/5 micron Sealed System. On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below .02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

COLOR OPTIONS

PreFixx Group II

- 100 Vinyl Face, Polycootton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302

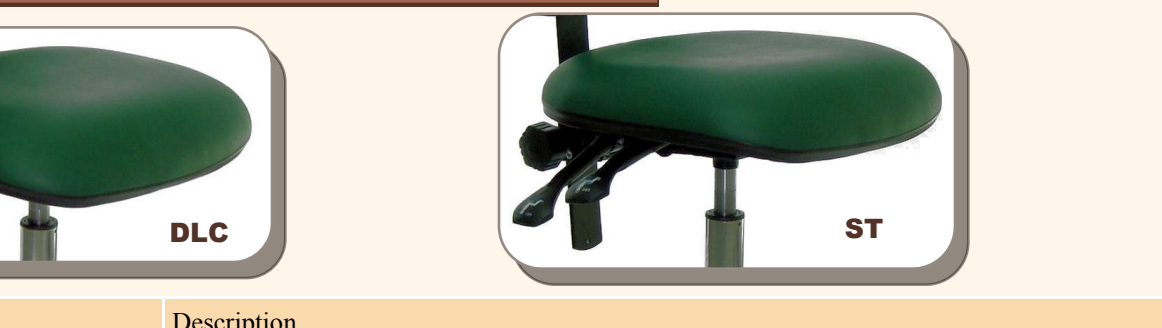


MECHANISM OPTIONS



| Controls | Description |
|----------|--|
| DLC | Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob) |
| ST | Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob) |
| FLC | Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob) |

FOOTRING OPTIONS

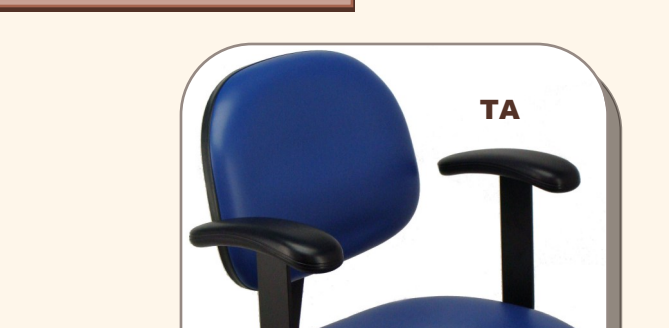





| Footring | Description |
|----------|---|
| FR04 | Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60) |
| FR05 | Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W) |
| FR06 | Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60) |

ARM REST OPTIONS



| Arms | Description |
|------|--|
| TF | Fixed Height and Width, Black |
| TA | Fixed Height and Adjustable Width, Black |
| TAA | Adjustable Height and Adjustable Width |

CASTER OPTIONS



| Caster | Description |
|--------|--|
| 1B | Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied |
| 1U | Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces |
| 1UB | Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied |
| 2 | Nylon Glide, Recommended for use in areas where requiring limited mobility |