

## 20W SERIES

## CLEANROOM VINYL



Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AE20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	19" W x 16.5" H	20"	Polished Aluminum	1
AE22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	19" W x 16.5" H		Polished Aluminum	1
PE20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	19" W x 16.5" H	20"	Black Nylon	1
PE22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	19" W x 16.5" H		Black Nylon	1

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/2 micron and or class 100/5 micron Sealed System. On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below.02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

### COLOR OPTIONS

#### \*PreFixx Group II\*

- 100 Vinyl Face, Poly/cotton Backing, Protective Coating for Increased Stain Resistance, Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, Federal Standard A-A-2950, UFAC Fabric Class 1, FMVSS-302




Blue-211 Navy-221 Burgundy-261 Black-251 Grey-231 Grey-232 Grey-233

### MECHANISM OPTIONS



Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

### FOOTRING OPTIONS

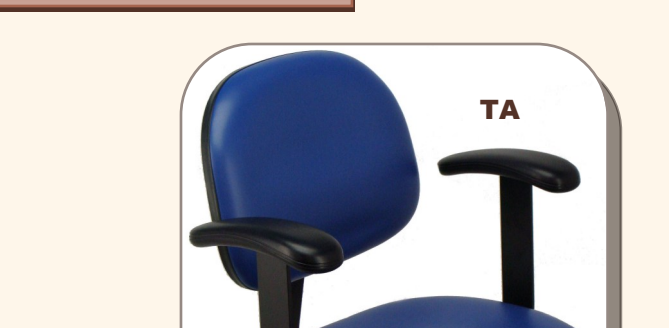



Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

### ARM REST OPTIONS



Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width



### CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility

## 20W SERIES

## CLEANROOM VINYL

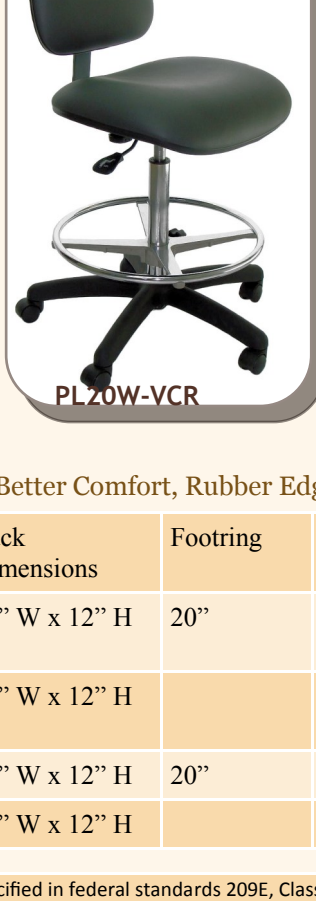

Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back


Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AL20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	15" W x 12" H	20"	Polished Aluminum	1
AL22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	15" W x 12" H		Polished Aluminum	1
PL20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	15" W x 12" H	20"	Black Nylon	1
PL22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	15" W x 12" H		Black Nylon	1

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/2 micron and or class 100/5 micron Sealed System. On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below.02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

### COLOR OPTIONS


#### \*PreFixx Group II\*

- 100 Vinyl Face, Poly/cotton Backing, Protective Coating for Increased Stain Resistance, Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, Federal Standard A-A-2950, UFAC Fabric Class 1, FMVSS-302

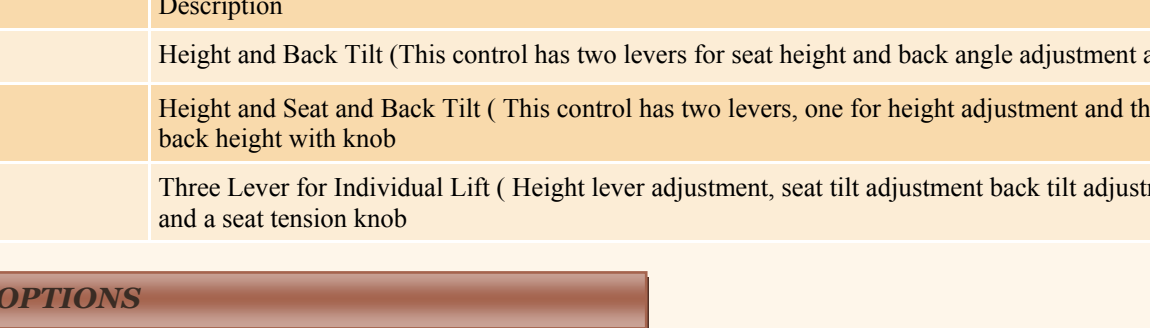

Blue-211 Navy-221 Burgundy-261 Black-251 Grey-231 Grey-232 Grey-233

### MECHANISM OPTIONS

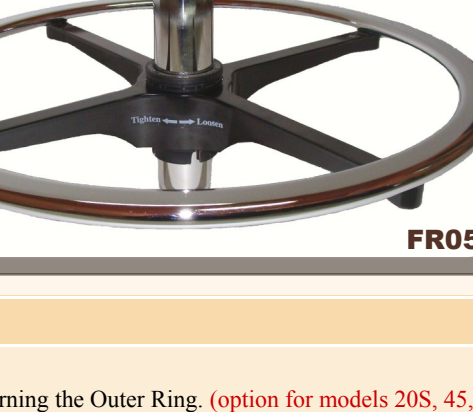

Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

### FOOTRING OPTIONS




Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

### ARM REST OPTIONS



Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width






### CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility

## 20W SERIES

## CLEANROOM VINYL

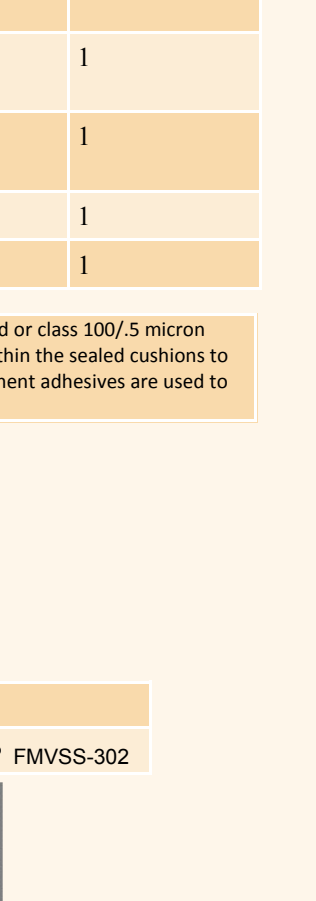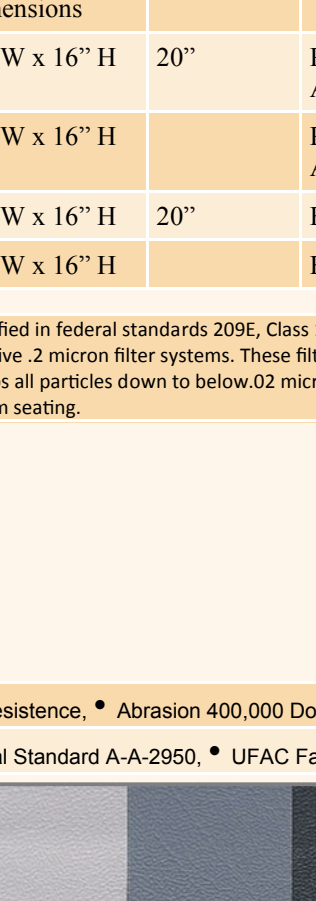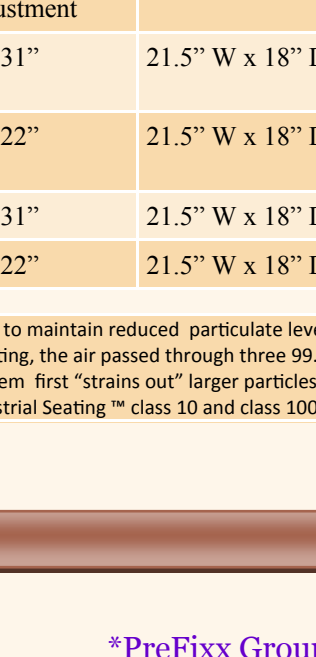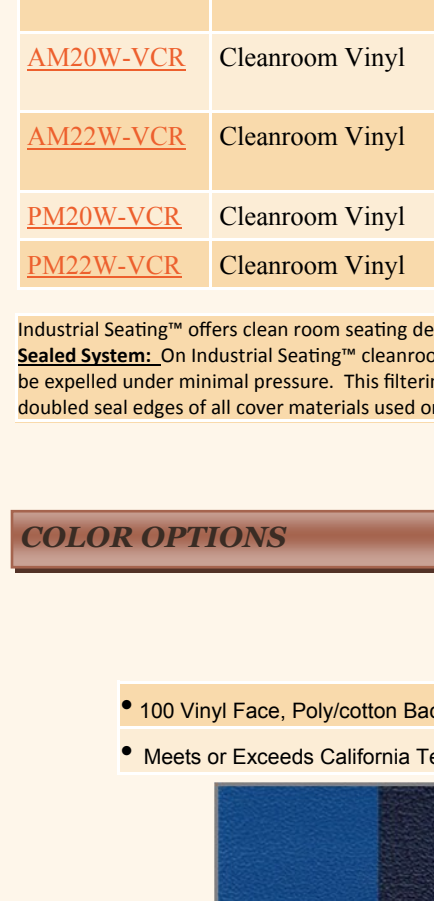

Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back


Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AM20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	16" W x 16" H	20"	Polished Aluminum	1
AM22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	16" W x 16" H		Polished Aluminum	1
PM20W-VCR	Cleanroom Vinyl	21"-31"	21.5" W x 18" D	16" W x 16" H	20"	Black Nylon	1
PM22W-VCR	Cleanroom Vinyl	17"-22"	21.5" W x 18" D	16" W x 16" H		Black Nylon	1

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/2 micron and or class 100/5 micron Sealed System. On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below.02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

### COLOR OPTIONS



#### \*PreFixx Group II\*

- 100 Vinyl Face, Poly/cotton Backing, Protective Coating for Increased Stain Resistance, Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, Federal Standard A-A-2950, UFAC Fabric Class 1, FMVSS-302

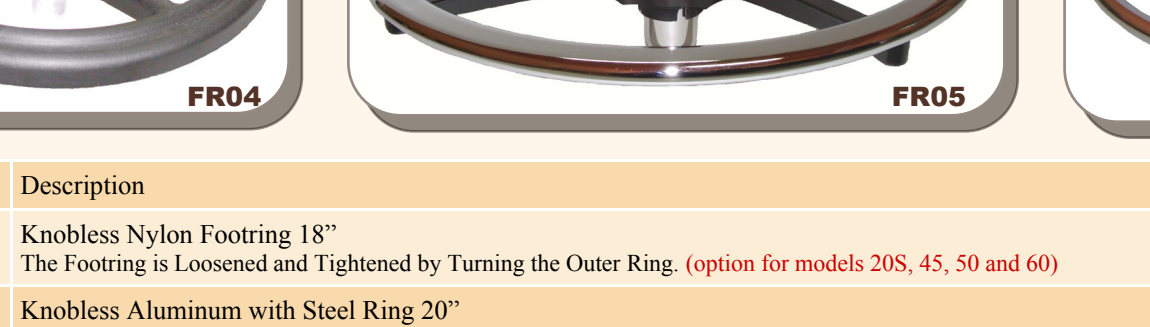



Blue-211 Navy-221 Burgundy-261 Black-251 Grey-231 Grey-232 Grey-233

### MECHANISM OPTIONS

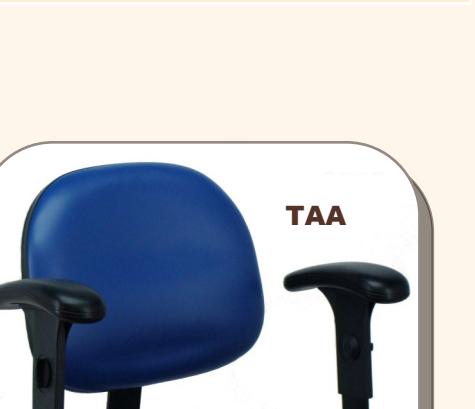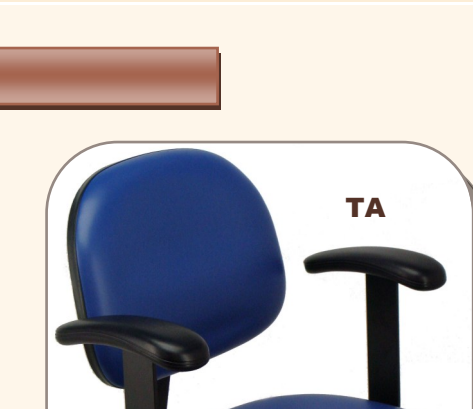




Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt ( This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift ( Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

### FOOTRING OPTIONS

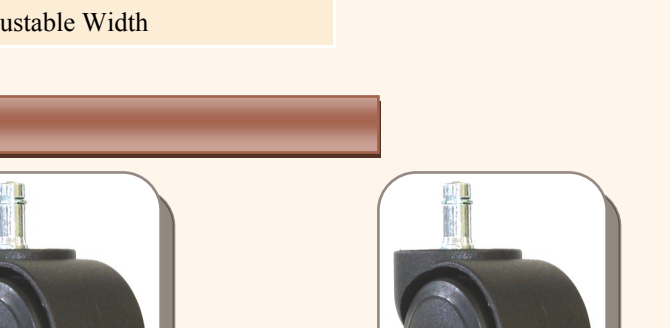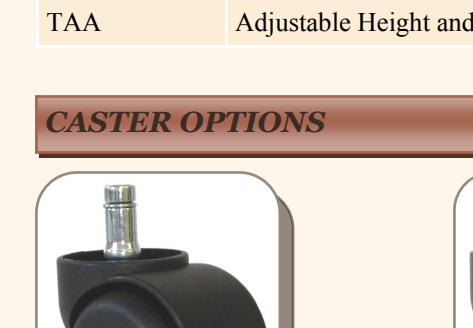




Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

### ARM REST OPTIONS



Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width

### CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility