







**CLEANROOM VINYL** 



Super Heavy	Duty 300 lbs, Capac	ity, 2.5" High Res	ilient Densit
Model	Upholstery Type	Height Adjustment	Seat Dimens
<u>A60-VCR</u>	Cleanroom Vinyl	21"-31"	18" W x 17'
A62-VCR	Cleanroom Vinyl	17"-22"	18" W x 17"
P60 VCP	Cleanroom Vinyl	21"_31"	18" W v 17"

Super Heavy Duty 300 lbs, Capacity, 2.5" High Re			2-VCR
Model	Upholstery Type	Height Adjustment	Seat Dimens
A60-VCR	Cleanroom Vinyl	21"-31"	18" W x 17"
A62-VCR	Cleanroom Vinyl	17"-22"	18" W x 17"

ty Foam for Better Comfort, Rubber Edge Band Base 18" Polished



	P
ling	Prote





sions Back Dimensions Footring 15" W x 12" H " D Aluminum 15" W x 12" H Polished Aluminum 18" W x 17" D 15" W x 12" H 18" Black Nylon Cleanroom Vinyl 21"-31" Cleanroom Vinyl 17"-22" 18" W x 17" D 15" W x 12" H Black Nylon

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/.2 micron and or class 100/.5 micron Sealed System: On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below.02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating ™ class 10 and class 100 clean room seating.

Blue-211 Navy-221 Burgundy-261 Black-251 Grey-231 Grey-232 Grey-233

CHANISM OPTIONS		
DLC	ST	

ST		back height w	
FLC		Three Lever for and a seat tens	
FOOT	RING OPTIONS	S	

DLC

Footring

FR04

FR05

FR06

Arms

TF

TA

TAA

**CASTER OPTIONS** 

Caster

1U

1UB

2

ARM REST OPTIONS



Description

Description

Fixed Height and Width, Black

Fixed Height and Adjustable Width, Black

Description

Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied

Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied

Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces

Nylon Glide, Recommended for use in areas where requiring limited mobility

Adjustable Height and Adjustable Width



FR04

Knobless Aluminum with Steel Ring 20"






Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)


Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)


The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)





TA

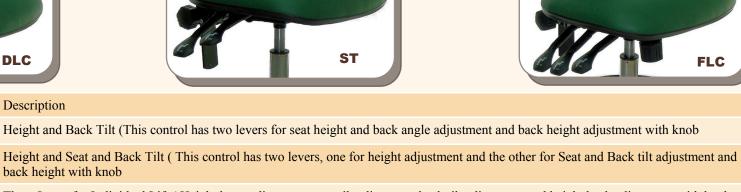


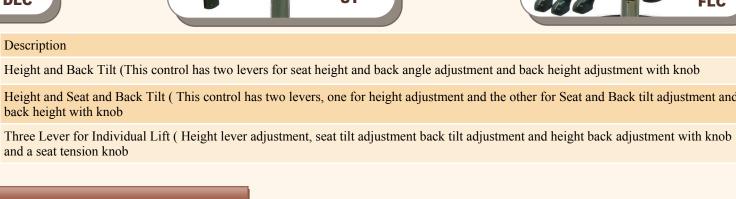



STANDARD STANDARD STANDARD STANDARD	

3			
s 1, •	FMVSS-302		

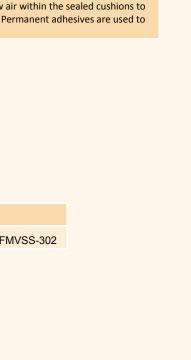



MECHANISM OPTION	NS .
	DLC
Controls	Description

HANISM OPTIONS		
D	LC	

- **COLOR OPTIONS**

P62-VCR g Protection on Seat &				
	Caster			
	1			
	1			
	1			
	1			