


10 SERIES

STANDARD FABRIC

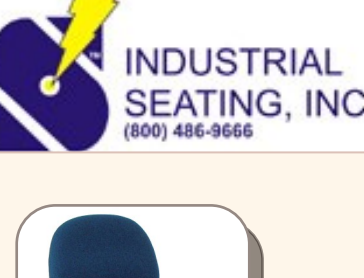

Super Heavy Duty 450 lbs. Capacity, 3" High Resilient Density Foam for Better Comfort

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AL10-F	Fabric	21"-31"	20" W x 18" D	15" W x 12" H	20"	Polished Aluminum	1
AL12-F	Fabric	17"-22"	20" W x 18" D	15" W x 12" H		Polished Aluminum	1
PL10-F	Fabric	21"-31"	20" W x 18" D	15" W x 12" H	20"	Black Nylon	1
PL12-F	Fabric	17"-22"	20" W x 18" D	15" W x 12" H		Black Nylon	1




COLOR OPTIONS

Pavarotti Group III

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1






MECHANISM OPTIONS

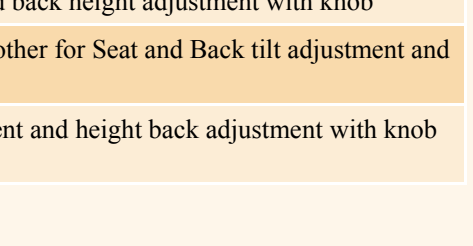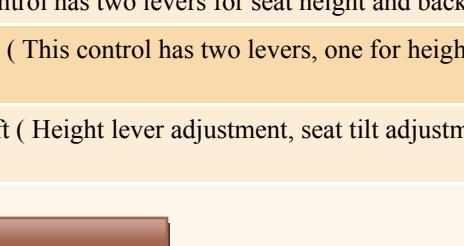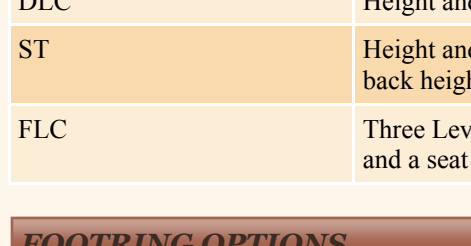



Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

FOOTRING OPTIONS

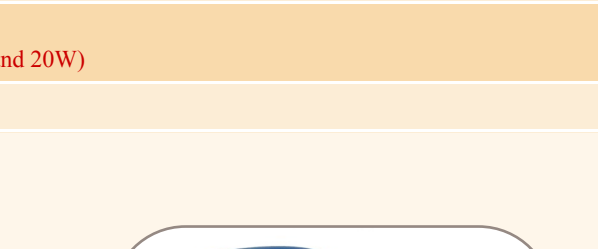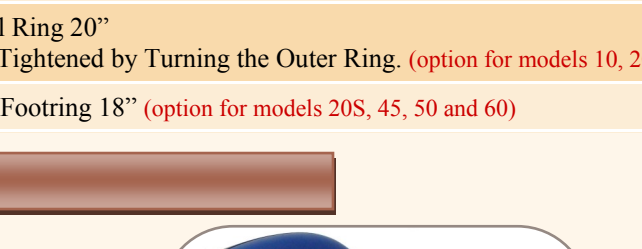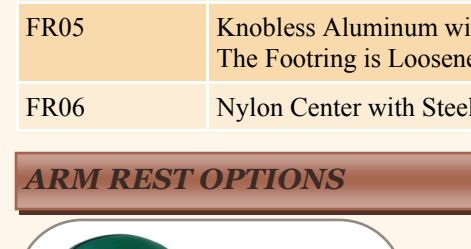



Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

ARM REST OPTIONS

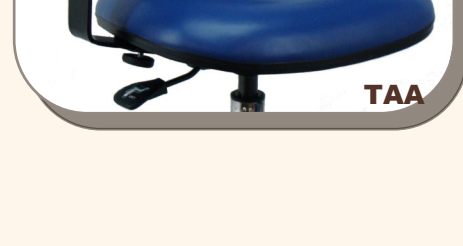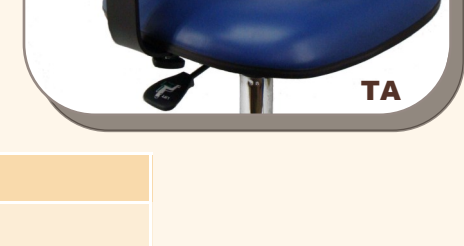

Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width

CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility

10 SERIES

STANDARD FABRIC



Super Heavy Duty 450 lbs. Capacity, 3" High Resilient Density Foam for Better Comfort

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AM10-F	Fabric	21"-31"	20" W x 18" D	16" W x 16" H	20"	Polished Aluminum	1
AM12-F	Fabric	17"-22"	20" W x 18" D	16" W x 16" H		Polished Aluminum	1
PM10-F	Fabric	21"-31"	20" W x 18" D	16" W x 16" H	20"	Black Nylon	1
PM12-F	Fabric	17"-22"	20" W x 18" D	16" W x 16" H		Black Nylon	1




COLOR OPTIONS

Pavarotti Group III

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1






MECHANISM OPTIONS

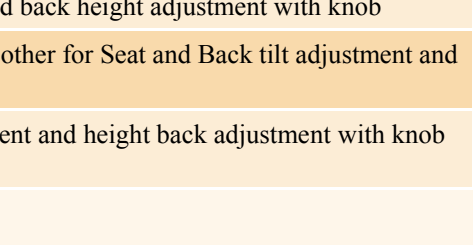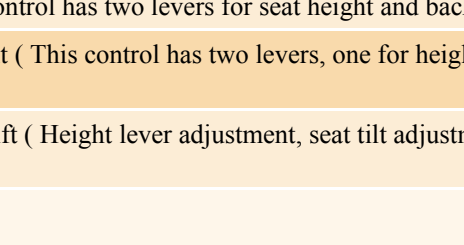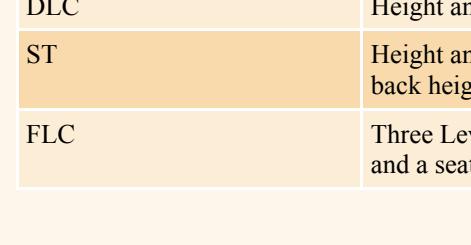

Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

FOOTRING OPTIONS

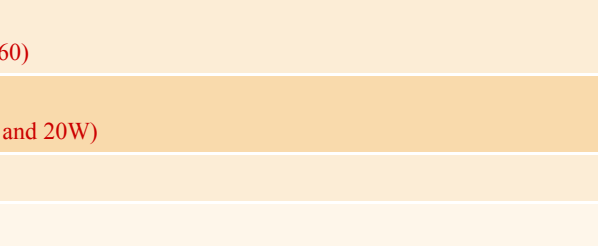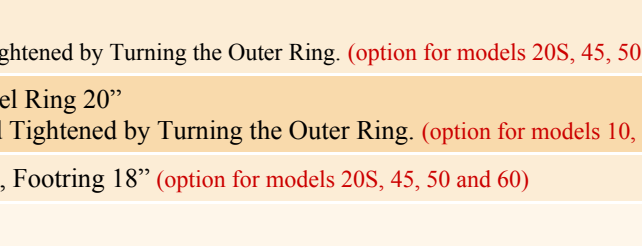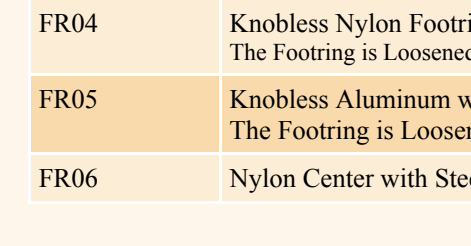

Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

ARM REST OPTIONS



Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width





CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility

10 SERIES

STANDARD FABRIC

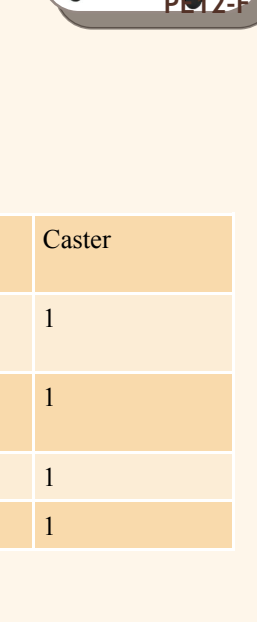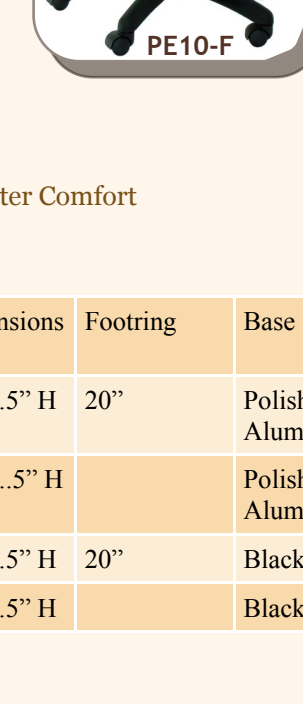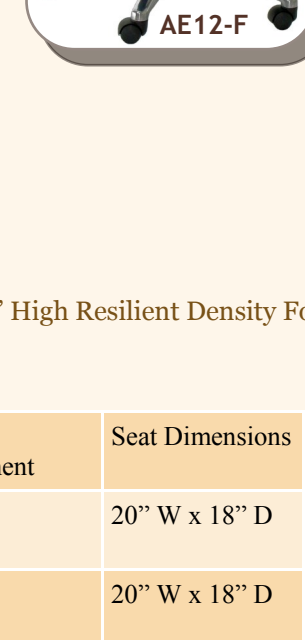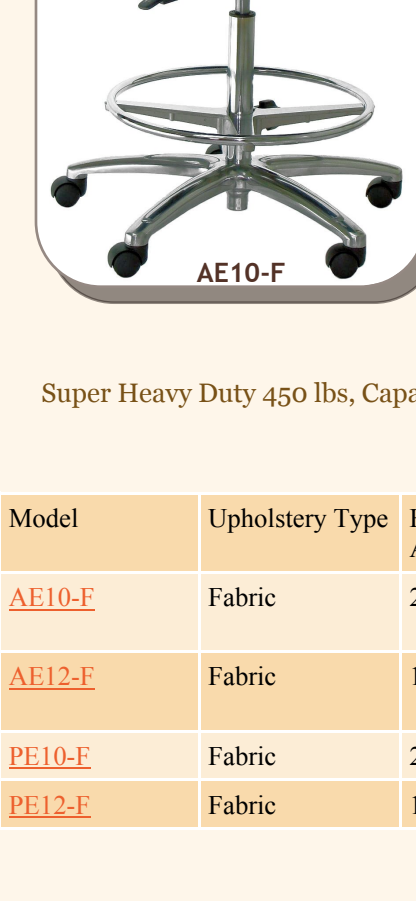


Super Heavy Duty 450 lbs. Capacity, 3" High Resilient Density Foam for Better Comfort

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AE10-F	Fabric	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Polished Aluminum	1
AE12-F	Fabric	17"-22"	20" W x 18" D	19" W x 16.5" H		Polished Aluminum	1
PE10-F	Fabric	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Black Nylon	1
PE12-F	Fabric	17"-22"	20" W x 18" D	19" W x 16.5" H		Black Nylon	1




COLOR OPTIONS

Pavarotti Group III

• 100% Polyolefin, • 250,000 Double Rubs, • Flame Resistance: California Tech Bulletin 117, Sec. E • CS-191-53, Class 1; BIFMA X5.7-1991, • NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1



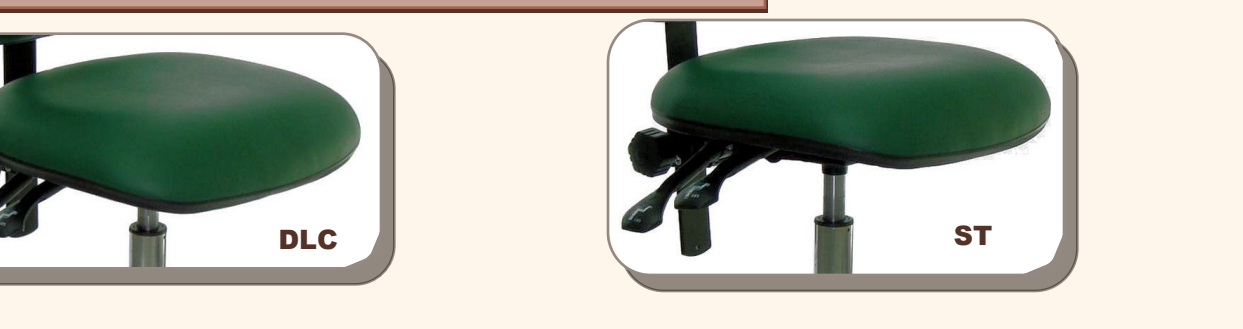


MECHANISM OPTIONS

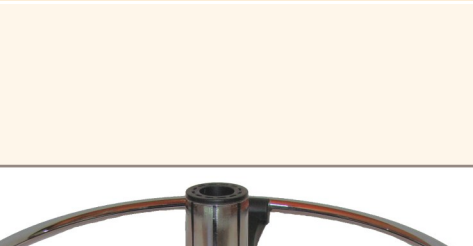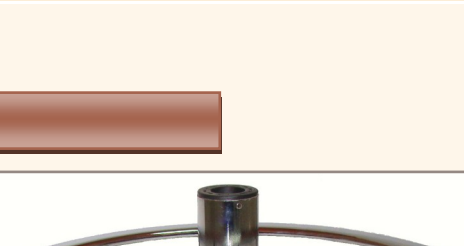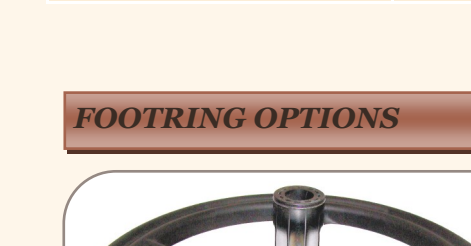



Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)

FOOTRING OPTIONS

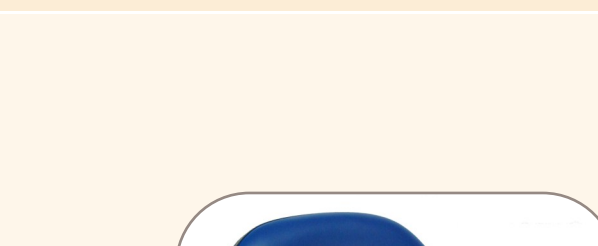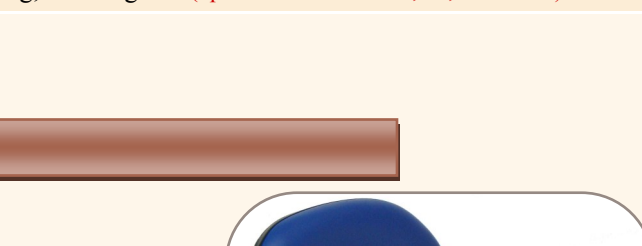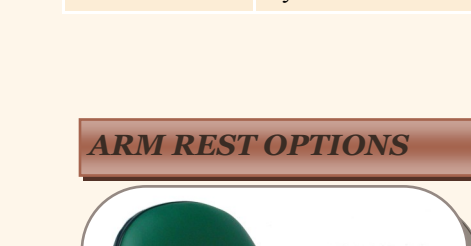




Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)

ARM REST OPTIONS

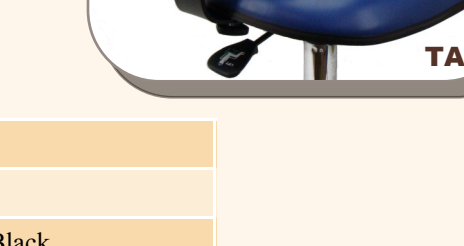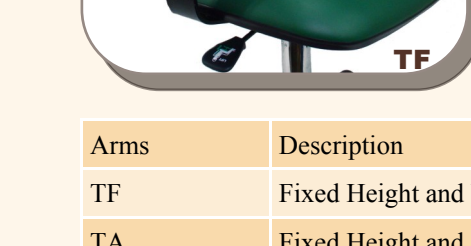

Arms	Description
TF	Fixed Height and Width, Black
TAA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width

CASTER OPTIONS



Caster	Description
1B	Braking Caster, Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility